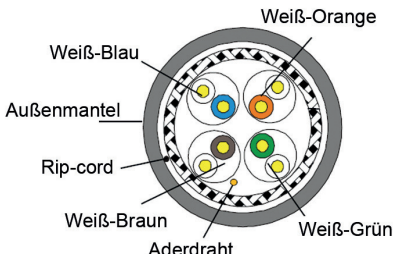


Cat6A - SFTP - STARR - LSZH

Kategorie	S/FTP CAT6A-4P-LSZH-AM30 (B2ca)																																																																												
Referenz	ISO/IEC 11801 TIA-568-C.2																																																																												
CPR Klasse	B2ca																																																																												
Kern	Starr - 100% Kupfer																																																																												
Schirmung	SFTP	Technische Leistung (100m):																																																																											
AWG	23	<table><tr><th>Frequenz (Mhz)</th><th>RL ≥dB</th><th>ATT ≤dB</th><th>NEXT ≥dB</th><th>DELAY ≤ns</th></tr><tr><td>1</td><td>20.0</td><td>-</td><td>74.3</td><td>570.0</td></tr><tr><td>4.0</td><td>23.0</td><td>3.8</td><td>65.3</td><td>552.0</td></tr><tr><td>8.0</td><td>24.5</td><td>5.3</td><td>60.8</td><td>546.7</td></tr><tr><td>10.0</td><td>25.0</td><td>5.9</td><td>59.3</td><td>545.4</td></tr><tr><td>16.0</td><td>25.0</td><td>7.5</td><td>56.2</td><td>543.0</td></tr><tr><td>20.0</td><td>25.0</td><td>8.4</td><td>54.8</td><td>542.1</td></tr><tr><td>25.0</td><td>24.3</td><td>9.4</td><td>53.3</td><td>541.2</td></tr><tr><td>31.25</td><td>23.6</td><td>10.5</td><td>51.9</td><td>540.4</td></tr><tr><td>62.5</td><td>21.5</td><td>15.0</td><td>47.4</td><td>538.6</td></tr><tr><td>100</td><td>20.1</td><td>19.1</td><td>44.3</td><td>537.6</td></tr><tr><td>200</td><td>18.0</td><td>27.6</td><td>39.8</td><td>536.5</td></tr><tr><td>250</td><td>17.3</td><td>31.1</td><td>38.3</td><td>536.3</td></tr><tr><td>300</td><td>16.8</td><td>34.3</td><td>37.1</td><td>536.1</td></tr><tr><td>500</td><td>15.2</td><td>45.3</td><td>33.8</td><td>535.6</td></tr></table>	Frequenz (Mhz)	RL ≥dB	ATT ≤dB	NEXT ≥dB	DELAY ≤ns	1	20.0	-	74.3	570.0	4.0	23.0	3.8	65.3	552.0	8.0	24.5	5.3	60.8	546.7	10.0	25.0	5.9	59.3	545.4	16.0	25.0	7.5	56.2	543.0	20.0	25.0	8.4	54.8	542.1	25.0	24.3	9.4	53.3	541.2	31.25	23.6	10.5	51.9	540.4	62.5	21.5	15.0	47.4	538.6	100	20.1	19.1	44.3	537.6	200	18.0	27.6	39.8	536.5	250	17.3	31.1	38.3	536.3	300	16.8	34.3	37.1	536.1	500	15.2	45.3	33.8	535.6
Frequenz (Mhz)	RL ≥dB	ATT ≤dB	NEXT ≥dB	DELAY ≤ns																																																																									
1	20.0	-	74.3	570.0																																																																									
4.0	23.0	3.8	65.3	552.0																																																																									
8.0	24.5	5.3	60.8	546.7																																																																									
10.0	25.0	5.9	59.3	545.4																																																																									
16.0	25.0	7.5	56.2	543.0																																																																									
20.0	25.0	8.4	54.8	542.1																																																																									
25.0	24.3	9.4	53.3	541.2																																																																									
31.25	23.6	10.5	51.9	540.4																																																																									
62.5	21.5	15.0	47.4	538.6																																																																									
100	20.1	19.1	44.3	537.6																																																																									
200	18.0	27.6	39.8	536.5																																																																									
250	17.3	31.1	38.3	536.3																																																																									
300	16.8	34.3	37.1	536.1																																																																									
500	15.2	45.3	33.8	535.6																																																																									
Durchmesser Kabel	7,5 mm																																																																												
Länge	305m																																																																												
Bandbreite	500.0 MHz																																																																												
Biegeradius	15x Durchmesser Kabel																																																																												
Maximale Ziehkraft (Mpa)	≥ 10.0																																																																												
Material Außenmantel	LSZH	<table><tr><th>Frequenz (Mhz)</th><th>PSNEXT ≥dB</th><th>ELFEXT ≤dB</th><th>PSELFEXT ≥dB</th></tr><tr><td>1</td><td>72.3</td><td>67.8</td><td>64.8</td></tr><tr><td>4.0</td><td>63.3</td><td>55.8</td><td>52.8</td></tr><tr><td>8.0</td><td>48.8</td><td>49.7</td><td>46.7</td></tr><tr><td>10.0</td><td>57.3</td><td>47.8</td><td>44.8</td></tr><tr><td>16.0</td><td>54.2</td><td>43.7</td><td>40.7</td></tr><tr><td>20.0</td><td>52.8</td><td>41.8</td><td>38.8</td></tr><tr><td>25.0</td><td>51.3</td><td>39.8</td><td>36.8</td></tr><tr><td>31.25</td><td>49.9</td><td>37.9</td><td>34.9</td></tr><tr><td>62.5</td><td>45.4</td><td>31.9</td><td>28.9</td></tr><tr><td>100</td><td>42.3</td><td>27.8</td><td>24.8</td></tr><tr><td>200</td><td>37.8</td><td>21.8</td><td>18.8</td></tr><tr><td>250</td><td>36.3</td><td>19.8</td><td>16.8</td></tr><tr><td>300</td><td>35.1</td><td>18.3</td><td>15.3</td></tr><tr><td>500</td><td>31.8</td><td>13.8</td><td>10.8</td></tr></table>	Frequenz (Mhz)	PSNEXT ≥dB	ELFEXT ≤dB	PSELFEXT ≥dB	1	72.3	67.8	64.8	4.0	63.3	55.8	52.8	8.0	48.8	49.7	46.7	10.0	57.3	47.8	44.8	16.0	54.2	43.7	40.7	20.0	52.8	41.8	38.8	25.0	51.3	39.8	36.8	31.25	49.9	37.9	34.9	62.5	45.4	31.9	28.9	100	42.3	27.8	24.8	200	37.8	21.8	18.8	250	36.3	19.8	16.8	300	35.1	18.3	15.3	500	31.8	13.8	10.8															
Frequenz (Mhz)	PSNEXT ≥dB	ELFEXT ≤dB	PSELFEXT ≥dB																																																																										
1	72.3	67.8	64.8																																																																										
4.0	63.3	55.8	52.8																																																																										
8.0	48.8	49.7	46.7																																																																										
10.0	57.3	47.8	44.8																																																																										
16.0	54.2	43.7	40.7																																																																										
20.0	52.8	41.8	38.8																																																																										
25.0	51.3	39.8	36.8																																																																										
31.25	49.9	37.9	34.9																																																																										
62.5	45.4	31.9	28.9																																																																										
100	42.3	27.8	24.8																																																																										
200	37.8	21.8	18.8																																																																										
250	36.3	19.8	16.8																																																																										
300	35.1	18.3	15.3																																																																										
500	31.8	13.8	10.8																																																																										
Farbe Außenmantel	Rot																																																																												
Aderfarben	1 - Weiß/ Blau																																																																												
	2 - Weiß/ Orange																																																																												
	3 - Weiß/ Grün																																																																												
	4 - Weiß/ Braun																																																																												
Rip-cord	Integriert																																																																												
Verpackung	Haspel																																																																												