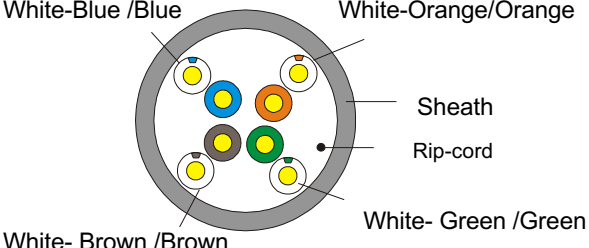


## U/UTP 4Pairs cable-category5E-LSZH Sheath

Content of the Data Sheet

Customer No.		Customer Reference																																																																																			
Category	U/UTP CAT5E-4P-LSZH(Dca,s2,d2,a1)																																																																																				
Reference Standard	ISO/IEC11801、TIA-568-C.2																																																																																				
Conductor	Material	Solid-Bare Copper																																																																																			
	Nom.O.D.(mm)	0.490	<table border="1" style="font-size: small;"> <tr> <td>up</td> <td>+0.005</td> </tr> <tr> <td>down</td> <td>-0.005</td> </tr> </table>						up	+0.005	down	-0.005																																																																									
up	+0.005																																																																																				
down	-0.005																																																																																				
Insulation	Material	HDPE																																																																																			
	Diameter	0.87±0.05mm																																																																																			
Sheath	Thickness	0.50±0.05 mm		<table border="1" style="font-size: small; width: 100%;"> <thead> <tr> <th colspan="6">Technical Performance(100m):</th> </tr> <tr> <th rowspan="2">Frequency (MHz)</th> <th>RL</th> <th>ATT</th> <th>NEXT</th> <th>Phase</th> <th></th> </tr> <tr> <th>≥dB</th> <th>≤dB</th> <th>≥dB</th> <th>≤ns</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>20.0</td> <td>2.0</td> <td>65.3</td> <td>570.00</td> <td></td> </tr> <tr> <td>4.0</td> <td>23.0</td> <td>4.1</td> <td>56.3</td> <td>552.00</td> <td></td> </tr> <tr> <td>8.0</td> <td>24.5</td> <td>5.8</td> <td>51.8</td> <td>546.73</td> <td></td> </tr> <tr> <td>10.0</td> <td>25.0</td> <td>6.5</td> <td>50.3</td> <td>545.38</td> <td></td> </tr> <tr> <td>16.0</td> <td>25.0</td> <td>8.2</td> <td>47.2</td> <td>543.00</td> <td></td> </tr> <tr> <td>20.0</td> <td>25.0</td> <td>9.3</td> <td>45.8</td> <td>542.05</td> <td></td> </tr> <tr> <td>25.0</td> <td>24.3</td> <td>10.4</td> <td>44.3</td> <td>541.20</td> <td></td> </tr> <tr> <td>31.25</td> <td>23.6</td> <td>11.7</td> <td>42.9</td> <td>540.44</td> <td></td> </tr> <tr> <td>62.5</td> <td>21.5</td> <td>17.0</td> <td>38.4</td> <td>538.55</td> <td></td> </tr> <tr> <td>100</td> <td>20.1</td> <td>22.0</td> <td>35.3</td> <td>537.60</td> <td></td> </tr> </tbody> </table>					Technical Performance(100m):						Frequency (MHz)	RL	ATT	NEXT	Phase		≥dB	≤dB	≥dB	≤ns		1	20.0	2.0	65.3	570.00		4.0	23.0	4.1	56.3	552.00		8.0	24.5	5.8	51.8	546.73		10.0	25.0	6.5	50.3	545.38		16.0	25.0	8.2	47.2	543.00		20.0	25.0	9.3	45.8	542.05		25.0	24.3	10.4	44.3	541.20		31.25	23.6	11.7	42.9	540.44		62.5	21.5	17.0	38.4	538.55		100	20.1	22.0	35.3	537.60	
	Technical Performance(100m):																																																																																				
	Frequency (MHz)	RL	ATT						NEXT	Phase																																																																											
		≥dB	≤dB						≥dB	≤ns																																																																											
	1	20.0	2.0						65.3	570.00																																																																											
4.0	23.0	4.1	56.3	552.00																																																																																	
8.0	24.5	5.8	51.8	546.73																																																																																	
10.0	25.0	6.5	50.3	545.38																																																																																	
16.0	25.0	8.2	47.2	543.00																																																																																	
20.0	25.0	9.3	45.8	542.05																																																																																	
25.0	24.3	10.4	44.3	541.20																																																																																	
31.25	23.6	11.7	42.9	540.44																																																																																	
62.5	21.5	17.0	38.4	538.55																																																																																	
100	20.1	22.0	35.3	537.60																																																																																	
	External O.D.	5.0±0.4 mm																																																																																			
	Surface	Clean,Frap,Satiation																																																																																			
	Material	FR-LSZH(complies RoHS)																																																																																			
	Color	TBD																																																																																			
Surface Printing	Letter height	3.0±0.3mm																																																																																			
	Color	Black																																																																																			
	Print error & Space	≤±0.5%, 1m																																																																																			
Core Color	1 White- Blue /Blue	2 White-Orange /Orange																																																																																			
	3 White- Green /Green	4 White- Brown /Brown																																																																																			
Packing	Wooden Tray & Carton																																																																																				
Carton dimension	According to the requires																																																																																				
Packing length	(305±1.5)m																																																																																				
Rip-cord	Yes	Drain wire	No																																																																																		
	<table border="1" style="font-size: small;"> <thead> <tr> <th rowspan="2">Frequency (MHz)</th> <th>PSNEXT</th> <th>ELFEXT</th> <th>PSELFEXT</th> </tr> <tr> <th>≥dB</th> <th>≥dB</th> <th>≥dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>62.3</td> <td>63.8</td> <td>60.8</td> </tr> <tr> <td>4</td> <td>53.3</td> <td>51.8</td> <td>48.8</td> </tr> <tr> <td>8</td> <td>48.8</td> <td>45.7</td> <td>42.7</td> </tr> <tr> <td>10</td> <td>47.3</td> <td>43.8</td> <td>40.8</td> </tr> <tr> <td>16</td> <td>44.4</td> <td>39.7</td> <td>36.7</td> </tr> <tr> <td>20</td> <td>42.8</td> <td>37.8</td> <td>34.8</td> </tr> <tr> <td>25</td> <td>41.3</td> <td>35.8</td> <td>32.8</td> </tr> <tr> <td>31.25</td> <td>39.9</td> <td>33.9</td> <td>30.9</td> </tr> <tr> <td>62.5</td> <td>35.4</td> <td>27.9</td> <td>24.9</td> </tr> <tr> <td>100</td> <td>32.3</td> <td>23.8</td> <td>20.8</td> </tr> </tbody> </table>			Frequency (MHz)	PSNEXT	ELFEXT	PSELFEXT	≥dB	≥dB	≥dB	1	62.3	63.8	60.8	4	53.3	51.8	48.8	8	48.8	45.7	42.7	10	47.3	43.8	40.8	16	44.4	39.7	36.7	20	42.8	37.8	34.8	25	41.3	35.8	32.8	31.25	39.9	33.9	30.9	62.5	35.4	27.9	24.9	100	32.3	23.8	20.8																																			
Frequency (MHz)	PSNEXT	ELFEXT	PSELFEXT																																																																																		
	≥dB	≥dB	≥dB																																																																																		
1	62.3	63.8	60.8																																																																																		
4	53.3	51.8	48.8																																																																																		
8	48.8	45.7	42.7																																																																																		
10	47.3	43.8	40.8																																																																																		
16	44.4	39.7	36.7																																																																																		
20	42.8	37.8	34.8																																																																																		
25	41.3	35.8	32.8																																																																																		
31.25	39.9	33.9	30.9																																																																																		
62.5	35.4	27.9	24.9																																																																																		
100	32.3	23.8	20.8																																																																																		
Sheath Physical Properties	Before Aging	Tensile Strength (Mpa)	≥10.0																																																																																		
		Elongation(%)	≥125																																																																																		
	Aging Period(°C×hrs)	100°C×24h×7d																																																																																			
	After Aging	Tensile Strength(Mpa)	≥8.0																																																																																		
		Elongation(%)	≥100																																																																																		
	Cold bend(-20±2°C×4h)	8×Cable O.D., No visible cracks																																																																																			
Electrical Characteristics (20°C)	1.0-100.0MHz	Impedance(Ω)	100±15																																																																																		
	1.0-100.0MHz	Delay Skew (ns/100m)	≤45																																																																																		
	DC Resistance(Ω/100m) max		9.38																																																																																		
	DC Conductor Resistance Unbalance(%) max		5.0																																																																																		
<b>Reaction to fire Classification: Dca,s2,d2,a1</b>																																																																																					